
RTJ-HQ Series Gas Pressure Regulator with Integrated Slam-Shut

Regulation + Slam-Shut All-in-One

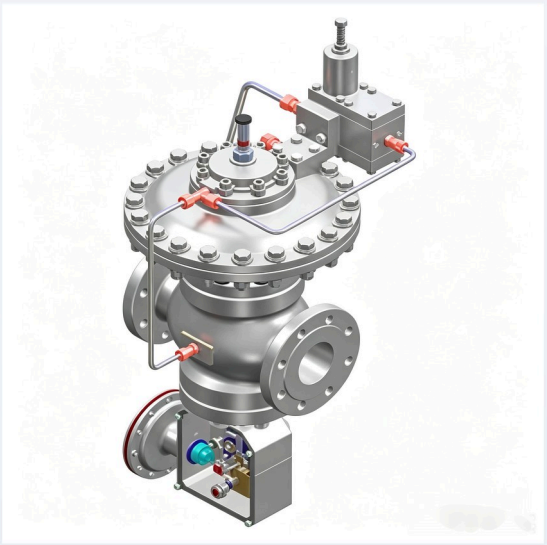

Product appearance for reference

MAIN TECHNICAL PARAMETERS

Nominal Size (DN) **DN50, DN80**	Construction Type **Pilot-operated (indirect-acting, two-stage pilot, integrated regulation and shut-off)**
Max. Inlet Pressure **4.0 MPa**	Outlet Pressure Range **0.06~2.5 MPa**
Accuracy Class **AC1**	Lock-up Pressure Class **SG2.5**
Operating Temperature **-20℃~60℃**	Connection Type **Flanged (pressure rating 1.6/2.5/4.0 MPa)**
Applicable Medium **Natural gas, manufactured gas, LPG and other fuel gases**	Safety Configuration **Integrated overpressure/under-pressure automatic shut-off (built-in, manual reset)**

PRODUCT FEATURES

- Modular design; integrated shut-off and regulation
- Externally mounted fully balanced structure for online maintenance and repair of the balance assembly
- Two-stage pilot for more accurate outlet pressure adjustment and simple setting
- High flow capacity, wide range of applications
- High sensitivity, fast response and reliable shut-off; optional built-in silencer
- Optional remote valve position indication

Flow Capacity

Flow table paste area

FLOW TABLE PASTE AREA

Paste the flow table from the official datasheet / catalogue

Standard Price	MOQ	Monthly Capacity	Lead Time
On request · Final quotation to prevail	**On request · Final quotation to prevail**	**On request · Final quotation to prevail**	**On request · Final quotation to prevail**

© SICHUAN YUANHENGDING TRADING CO., LTD. · This manual is for reference only